

# VMAX ALL FLASH FAMILY

## VMAX 250F, 950F

The exciting Dell EMC VMAX All Flash family offers the VMAX 250F and VMAX 950F arrays. The VMAX 950F delivers unparalleled performance and scalability as a mission-critical multi-controller platform utilizing Intel® Xeon® E5-2697-v4 18 core processors running at 2.3GHz. With the highest capacity 7.68 and 15.36TB Enterprise Flash drives, and Dual V-Brick/cabinet packaging this new Enterprise class array offers a compelling value proposition designed for the most demanding storage workloads, including new support for Mixed Mainframe and Open Systems hosts. Like all members of the All Flash family, your data always resides in the fastest possible tier (Diamond) to deliver the highest IOPS throughput and lowest possible latency. PowerMaxOS with service levels is an attractive option for VMAX All Flash customers.



VMAX All Flash

VMAX All Flash arrays extend the long tradition of VMAX Reliability, Availability and Serviceability that our customers have come to expect. A single V-Brick is architected to provide six-nines (99.9999%) of Availability in the most demanding, mission critical environments. Ranging from 1 to 8 V-Bricks packaged in dual V-Brick racks along with their associated DAEs, the VMAX All Flash family offers unprecedented scale and footprint efficiency. The built-in hypervisor enables VMAX All Flash to offer unified block and file support through Embedded NAS (eNAS), as well as Embedded Management.

VMAX All Flash arrays are available in two software packages, the standard “F” package and the application rich “FX” package, which makes ordering easy. The FX package includes licensed support for SRDF S/A/STAR/Metro, Data at Rest Encryption, eNAS, and both include VASA Provider Certified support for vVols, and Secure Snaps, a SnapVX feature eliminating the ability for admins to delete snapshots. VMAX All Flash arrays also offer the optional support for RecoverPoint for heterogeneous replication with Dell EMC arrays. As always, VMAX All Flash arrays come fully pre-configured out of the factory to significantly shorten the time to first I/O.

## Specifications

### Appliance-based packaging

The Dynamic Virtual Matrix Architecture that allows aggregate scaling of system resources has been extended to VMAX All Flash Arrays, where basic storage building blocks are defined by appliance-based entities called V-Bricks. Each V-Brick includes an engine with two VMAX directors, packaged software, and, depending on the platform, from 512 GB to 2 TB of cache, and two 25-slot Drive Array Enclosures housing a minimum base capacity of 13.2 TBu of flash capacity in the VMAX 250F, or two 120-slot Drive Array Enclosures with minimum base capacities of 13.2 TBu for 100% CKD MF systems, and 53.6TBu for Open Systems on the VMAX 950F. Multi V-Brick systems also include redundant InfiniBand interfaces to connect all V-Bricks in the array. Additional flash capacity can be added to each V-Brick in varying increments up to a total usable capacity of 4.4 PB on the VMAX 950F, along with inline compression, supported on all members of the VMAX All Flash family.

Inline compression is supported across the entire VMAX All Flash family as of the Q3 2016 HYPERMAX 5977 release. Each director consolidates front-end, global memory, and back-end functions, enabling direct memory access to data for optimized I/O operations. Depending on the array chosen, up to eight (8) VMAX All Flash V-Bricks can be supported for highly scalable performance and high availability. Additional specifications and a comparison of the VMAX 250F and 950F arrays follow.

| Array family                                  | VMAX 250F/VMAX 250FX  | VMAX 950F/VMAX 950FX   |
|---|---|--|
| <b>V-BRICKS</b>                               |   |  |
| Number of V-Bricks                            | 1 to 2  | 1 to 8   |
| ENGINE ENCLOSURE                              | 4u  | 4u   |
| CPU   | Intel Xeon E5-2650-v4   | Intel Xeon E5-2697-v4  |
|   | <sup>4</sup> 2.5 GHz 12 core  | <sup>4</sup> 2.8 GHz 18 core   |
| # CORES PER CPU/PER ENGINE/PER SYSTEM         | 12/48/96  | 18/72/576  |
| DYNAMIC VIRTUAL MATRIX INTERCONNECT           | Direct Connect InfiniBand   | InfiniBand Dual Redundant Fabric:  |
|   | 56 Gbps per port  | 56 Gbps per port   |
| <b>CACHE</b>                                  |   |  |
| CACHE-SYSTEM MIN (RAW)                        | 512 GB  | 1,024 GB   |
| CACHE-SYSTEM MAX (RAW)                        | 4 TB (with 2,048 GB engine)   | 16 TB (with 2,048 GB engine)   |
| CACHE-PER ENGINE OPTIONS                      | 512 GB, 1 TB, and 2 TB  | 1 TB, 2 TB   |
| <b>VAULT</b>                                  |   |  |
| VAULT STRATEGY                                | Vault to Flash  | Vault to Flash   |
| VAULT IMPLEMENTATION                          | 2 to 4 NVMe Flash SLICs / Engine  | 4 to 8 NVMe Flash SLICs / Engine   |
| <b>FRONT END I/O MODULES</b>                  |   |  |
| MAXIMUM FRONT-END I/O MODULES/V-BRICK         | 8   | 6 (up to 8 on Mainframe)   |
| FRONT-END I/O MODULES AND PROTOCOLS SUPPORTED | FC: 4 x 8 Gbs (FC, SRDF)<br>FC: 4 x 16 Gbs (FC, SRDF)<br>10 GbE: 4 x10 GbE(iSCSI, SRDF)<br>GbE: 4 x 1 GbE(2 Cu/2 Opt SRDF)  | FC: 4 x 8 Gbs (FC, SRDF)<br>FC: 4 x 16 Gbs (FC, SRDF)<br>10 GbE: 4 x10 GbE (iSCSI, SRDF)<br>GbE 4 x 1 GbE (2 Cu/2 Opt SRDF)<br>FICON: 4 x 16 Gbs (FICON) |
| <b>eNAS I/O MODULES</b>                       |   |  |
| MAX eNAS I/O MODULES/ SOFTWARE DATA MOVER     | <sup>5</sup> 3  | <sup>5</sup> 3   |
| eNAS I/O MODULES SUPPORTED                    | <sup>1</sup> 10 GbE: 2 x 10 GbE Optical<br><sup>1</sup> 10 GbE: 2 x 10 GbE Cu<br><sup>2</sup> 8 Gbs: 4 x 8 Gbs FC (Tape BU) | <sup>1</sup> 10 GbE: 2 x 10 GbE Optical<br><sup>1</sup> 10 GbE: 2 x 10 GbE Cu<br><sup>2</sup> 8 Gbs: 4 x 8 Gbs FC (Tape BU)                              |
| <b>eNAS SOFTWARE DATA MOVERS</b>              |   |  |
| MAX SOFTWARE DATA MOVERS                      | 4 (3 Active + 1 Standby)<br>(4 Data Movers requires minimum 2 V-Bricks)   | <sup>3</sup> 8 (7 Active and 1 Standby)<br>(8 Data Movers requires minimum 4 V-Bricks)   |
| MAX NAS CAPACITY/ARRAY (TERABYTES USABLE)     | 1158 (cache limited)  | 3584   |

<sup>1</sup> Quantity one (1) 2 x 10 GbE Optical module is the default choice/Data Mover.

<sup>2</sup> Used to support NDMP Tape Backup

<sup>3</sup> Support for 8 Data Movers on the VMAX 950F/FX is available by request.

<sup>4</sup> CPUs run in Turbo Mode except at elevated ambient temperatures.

<sup>5</sup> Two eNAS I/O modules/Datamover standard. Three can be supported depending on configuration via RPQ.

| Array family                               | VMAX 250F/VMAX 250FX  | VMAX 950F/VMAX 950FX   |
|--|---|--|
| <b>CAPACITY, DRIVES</b>                    |   |  |
| Max Capacity per Array (Open) <sup>1</sup> | 1.16 PBe  | 4.42 PBe   |
| Base Capacity per V-Brick (Open)           | <sup>3</sup> 13.2 TBu   | 52.6 TBu   |
| Base Capacity per V-Brick (Mainframe)      | N/A   | 13.2 TBu   |
| Incremental Capacity Blocks                | <sup>3</sup> 13.2 TBu   | 13.2 TBu   |
| Max Drives per V-Brick                     | 50  | 240  |
| Max Drives per Array                       | 100   | 1,920  |
| Max Drives per System Bay                  | 100/200 <sup>2</sup>  | 480  |
| Min Drive Count per V-Brick                | 8 + 1 Spare   | 16 + 1 spare   |
| <b>FLASH DRIVES</b>                        |   |  |
| Flash Drives Supported (2.5")              | 960 GB, 1.92 TB, 3.84 TB, 7.68 TB, 15.36 TB   | 960 GB, 1.92 TB, 3.84 TB, 7.68 TB, 15.36 TB  |
| BE Interface                               | 12 Gbps SAS   | 6 Gbps SAS   |
| RAID Options Supported                     | RAID 5(7+1) (default)<br>RAID 5(3+1)<br>RAID 6(6+2)                                     | RAID 5(7 + 1)<br>RAID 6(14+2)  |
| Mixed RAID Group Support                   | No  | No   |
| Support for Mixed Drive Capacities         | Yes   | Yes  |
| <b>FLASH ARRAY ENCLOSURES</b>              |   |  |
| 120 x 2.5" Drive DAE                       | No  | Yes  |
| 25 x 2.5" Drive DAE                        | Yes   | No   |
| <b>CABINET CONFIGURATIONS</b>              |   |  |
| Standard 19" bays                          | Yes   | Yes  |
| Single V-Brick System Bay Configuration    | No (Packaging based on Dual V-Bricks, but initial V-Brick in each System Bay supported) | No (Packaging based on Dual V- Bricks, but initial V-Brick in each System Bay supported) |
| Dual V-Brick System Bay Configuration      | Yes (Default packaging)   | Yes (Default packaging)  |
| Third Party Rack Mount Option              | Yes   | Yes  |
| <b>DISPERSION</b>                          |   |  |
| Third Party Rack Mount Option              | N/A-single floor tile system  | Yes (on request)   |
| <b>PRE-CONFIGURATION FROM FACTORY</b>      |   |  |
| 100% Thin Provisioned                      | Yes   | Yes  |
| <b>HOST SUPPORT</b>                        |   |  |
| Open Systems                               | Yes   | Yes  |
| Mainframe                                  | No  | Yes  |
| Mixed Mainframe and Open                   | No  | Yes  |
| <b>POWER OPTIONS</b>                       |   |  |
| Input Power Options                        | Single or Three Phase<br>Delta or Wye   | Single or Three Phase<br>Delta or Wye  |

<sup>1</sup> Max capacity per array based on over provisioning ratio of 1.0.


<sup>2</sup> 200 drives can be supported in a single cabinet when two systems are packaged in the same rack.

<sup>3</sup> 13.2TBu V-Brick and Capacity Block usable capacities are based on RAID 5 (7+1). 11.3TBu base capacity and Capacity Block increments possible with RAID 5(3+1) on VMAX 250F

| Array family                        | VMAX 250F/VMAX 250FX | VMAX 950F/VMAX 950FX |
|-------------------------------------|----------------------|----------------------|
| <b>I/O PROTOCOLS SUPPORTED</b>      |                      |                      |
| <b>8 Gb/s FC Host/SRDF Ports</b>    |                      |                      |
| Maximum/V-Brick                     | 32                   | 24                   |
| Maximum/array                       | 64                   | 192                  |
| <b>16 Gb/s FC Host Ports</b>        |                      |                      |
| Maximum/V-Brick                     | 32                   | 24                   |
| Maximum/array                       | 64                   | 192                  |
| <b>16 Gb/s FICON Host Ports</b>     |                      |                      |
| Maximum/V-Brick                     | N/A                  | 32                   |
| Maximum/array                       | N/A                  | 256                  |
| <b>10 GbE iSCSI Ports (Optical)</b> |                      |                      |
| Maximum/V-Brick                     | 32                   | 24                   |
| Maximum/array                       | 64                   | 192                  |
| <b>10 GbE SRDF Ports (Optical)</b>  |                      |                      |
| Maximum/V-Brick                     | 32                   | 24                   |
| Maximum/array                       | 64                   | 192                  |
| <b>GbE SRDF Ports (Optical/Cu)</b>  |                      |                      |
| Maximum/V-Brick                     | 16/16                | 12/12                |
| Maximum/array                       | 64                   | 96                   |
| <b>Embedded NAS ports</b>           |                      |                      |
| <b>10 GbE Optical Ports</b>         |                      |                      |
| Max ports/Software Data Mover       | 4                    | 4                    |
| Maximum ports/array                 | 16                   | 32                   |
| <b>10 GbE Copper Ports</b>          |                      |                      |
| Max ports/Software Data Mover       | 4                    | 4                    |
| Maximum ports/array                 | 16                   | 32                   |
| <b>8 Gb/s FC Tape Back Up Ports</b> |                      |                      |
| Max ports/Software Data Mover       | 2                    | 2                    |
| Maximum ports/array                 | 8                    | 16                   |

## System bay dispersion

System Bay Dispersion allows customers to separate any individual or contiguous group of system bays by up to a distance of 82 feet (25 meters) from System Bay 1. This provides unsurpassed datacenter flexibility in solving floor loading constraints or working around obstacles that might preclude fully contiguous configurations. This is applicable to VMAX 950F, as the VMAX 250F is a single bay solution.

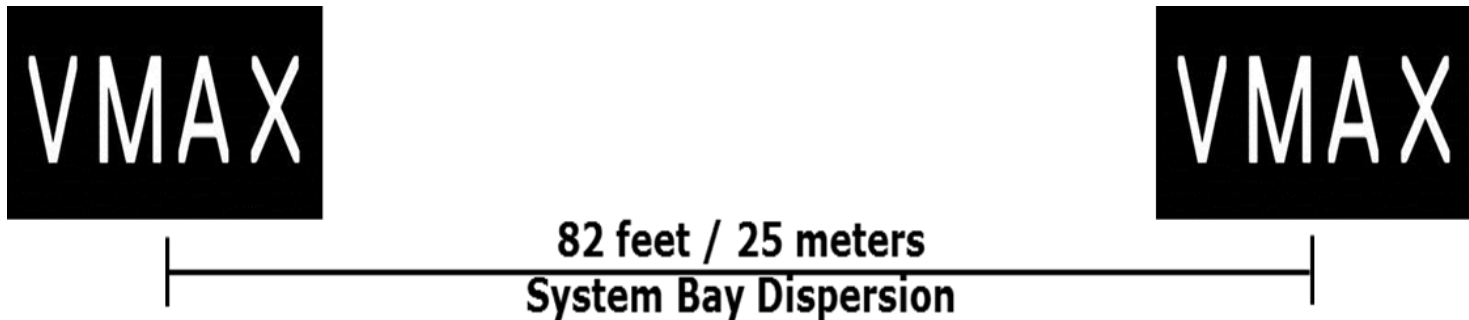

## Flash drive support

The VMAX 250F/FX (12 Gb/s) and the 450F/FX and 850F/FX (6 Gb/s) support the latest dual ported native SAS Flash drives. All Flash drives support two independent I/O channels with automatic failover and fault isolation. Check with your Dell EMC sales representative for the latest list of supported drives and types. All capacities are based on 1 GB = 1,000,000,000 bytes. Actual usable capacity may vary depending upon configuration.

## 2.5" support flash drives used in V-Bricks and capacity upgrades

| Platform support                                  | VMAX 250F, 950F     | VMAX 250F, 950F      | VMAX 250F, 950F      | VMAX 250F, 950F      | VMAX 250F, 950F       |
|---|---------------------|----------------------|----------------------|----------------------|-----------------------|
| Nominal capacity (GB)                             | 1960                | 11920                | 13840                | 17680                | 115360                |
| Type  | Flash               | Flash                | Flash                | Flash                | Flash                 |
| Average seek time (read/write ms)                 | N/A                 | N/A                  | N/A                  | N/A                  | N/A                   |
| Raw Capacity (GB)                                 | 960                 | 1920                 | 3840                 | 7680                 | 15360                 |
| <sup>3</sup> Open systems formatted capacity (GB) | 938.94              | 1879.64              | 3761.03              | 7522.06              | 15047.65              |
| Mainframe 3390 formatted capacity                 | <sup>2</sup> 940.26 | <sup>2</sup> 1880.52 | <sup>2</sup> 3761.80 | <sup>2</sup> 7523.61 | <sup>2</sup> 15047.98 |

<sup>1</sup> V-Bricks and capacity upgrades in any given configuration could contain a maximum of two different underlying drive sizes in order to best achieve the desired usable capacity. This is automatically optimized by the VMAX Sizer Tool.

<sup>2</sup> Mainframe is not supported on VMAX 250F.

<sup>3</sup> Open systems formatted capacity is also referred to as TBu in this document.

## Power consumption and heat dissipation at <26 and >35 degrees C

| Component   | VMAX 250F/FX                          |        |                                   |        | VMAX 950F/FX                          |        |                                   |        |
|---|---------------------------------------|--------|-----------------------------------|--------|---------------------------------------|--------|-----------------------------------|--------|
|   | Maximum Total power consumption (kVA) |        | Maximum Heat dissipation (Btu/hr) |        | Maximum Total power consumption (kVA) |        | Maximum Heat dissipation (Btu/hr) |        |
| Maximum power and heat dissipation at temperatures <26° C and >35° C <sup>2,3</sup> | <26° C                                | >35° C | <26° C                            | >35° C | <26° C                                | >35° C | <26° C                            | >35° C |
| System bay 1, dual engine   | 4.13                                  | 5.19   | 14,090                            | 17,698 | 7.25                                  | 9.61   | 24,712                            | 32,760 |
| System bay 2, dual engine <sup>1</sup>  | N/A                                   | N/A    | N/A                               | N/A    | 6.80                                  | 8.90   | 23,178                            | 30,339 |

<sup>1</sup> Power values for System Bay 2 and all subsequent system bays where applicable.

<sup>2</sup> Power values and heat dissipations shown at >35 degrees C reflect the higher power levels associated with both the battery recharge cycle, and the initiation of high ambient temperature Adaptive Cooling algorithms.

<sup>3</sup> Values at <26° C are reflective of more steady state maximum values during normal operation.

## Physical specifications

| Component                                 | Height (in/cm) | Width (in/cm) | Depth (in/cm) | Weight (maximum lbs/kgs) |
|---|----------------|---------------|---------------|--------------------------|
| System bay, dual engine 950F              | 75/190         | 24/61         | 47/119        | 1860/844                 |
| System bay, dual engine 250F              | 75/190         | 24/61         | 42/106.7      | 850/385                  |
| System bay, dual engine, dual system 250F | 75/190         | 24/61         | 42/106.7      | 1410/640                 |

## Input power requirements

### Single phase North American, international, Australian

| Specification                             | North American 3-wire connection (2 L and 1 G) <sup>1</sup>  | International and Australian 3-wire connection (1 L and 1 N and 1 G) <sup>1</sup> |
|---|--|---|
| Input nominal voltage                     | 200 – 240 VAC +/- 10% L - L nom  | 220 – 240 VAC +/- 10% L - N nom   |
| Frequency                                 | 50 – 60 Hz   | 50 – 60 Hz  |
| Circuit breakers                          | 30 A   | 32 A  |
| Power zones                               | Two  | Two   |
| Power requirements at customer site (min) | One 30A, single phase drop per zone (250F)<br>Three 30A, single phase drops per zone (950F)<br>Two power zones require 2 drops (250F), 6 drops (950F) with each drop rated for 30A |   |

<sup>1</sup> L = line or phase, N = neutral, G = ground

### Three-phase North American, international, Australian

| Specification                             | North American (DELTA) 4-wire connection (3 L and 1 G) <sup>1</sup> | International (WYE) 5-wire connection (3 L and 1 N and 1 G) <sup>1</sup> |
|---|---|--|
| Input voltage <sup>2</sup>                | 200 – 240 VAC +/- 10% L - L nom                                     | 220 – 240 VAC +/- 10% L - N nom  |
| Frequency                                 | 50 – 60 Hz  | 50 – 60 Hz   |
| Circuit breakers                          | 50 A  | 32 A   |
| Power zones                               | Two   | Two  |
| Power requirements at customer site (min) | Two 50 A, three-phase drops per bay                                 | Two 32 A, three-phase drops per bay                                      |

<sup>1</sup>L = line or phase, N = neutral, G = ground

<sup>2</sup>An imbalance of AC input currents may exist on the three-phase power source feeding the array, depending on the configuration. The customer's electrician must be alerted to this possible condition to balance the phase-by-phase loading conditions within the customer's data center

## Radio frequency interference

Electro-magnetic fields which include radio frequencies can interfere with the operation of electronic equipment. Dell EMC products have been certified to withstand radio frequency interference in accordance with standard EN61000-4-3. In Data Centers that employ intentional radiators, such as cell phone repeaters, the maximum ambient RF field strength should not exceed 3 Volts /meter.

| Repeater power level (watts) | Recommended minimum distance (feet/meters) |
|------------------------------|--|
| 1                            | 9.84 FT (3 M)                              |
| 2                            | 13.12 FT (4 M)                             |
| 5                            | 19.69 FT (6 M)                             |
| 7                            | 22.97 FT (7 M)                             |
| 10                           | 26.25 FT (8 M)                             |
| 12                           | 29.53 FT (9 M)                             |
| 15                           | 32.81 FT (10 M)                            |

## STATEMENT OF COMPLIANCE

Dell EMC Information Technology Equipment is compliant with all currently applicable regulatory requirements for Electromagnetic Compatibility, Product Safety, and Environmental Regulations where placed on market.

Detailed regulatory information and verification of compliance is available at the Dell Regulatory Compliance website. [http://dell.com/regulatory\\_compliance](http://dell.com/regulatory_compliance)

This product has been tested and verified that it will function within the allowable range of environmental attributes of Operating condition class ASHRAE level A2 between 10 and 35 degrees C, and within the corresponding relative humidity range.



[Learn more](#) about Dell EMC VMAX All Flash



[Contact](#) a Dell EMC Expert



[View more](#) resources



Join the conversation with #VMAXAllFlash